

# FI114962 61 lb/hr Deka IV Short




### Features

Fuel Compatibility	Standard Gasolines & Ethanol Flex Fuels
Fuel Pressure	300 kPa
Static Flow Rate	n-Heptane: 7.64 g/sec (61 lb/hr, 668 cc)
Dynamic Flow Rate	n-Heptane: mg/pulse (15.7 mg/pulse 2.5 ms PW, 20 ms Period)
Offset	0.67
Minimum Linear PW	1.5 ms
Linear Flow Range (SAE)	6.43
Opening/Closing Time	1.3 ms / 0.7 ms
Coil Resistance	12.0 Ω
Injector Inductance	11.6 mH
SMOV / DMOV	4.85 V / 5.28 V
Connector	Minitimer
Spray Pattern	26° Cone
Installation Compatibility	Deka V Short & VII Short Installation Compatible
Identification Shell Color	Blue


### Connector



### Basic Dimensions


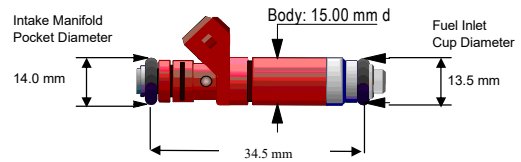


### Spray Characteristics (2 Hole Orifice)

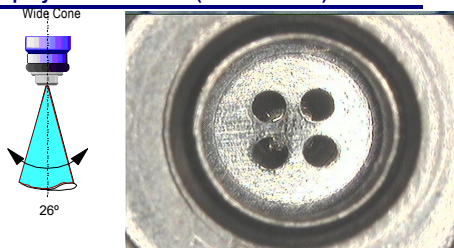


### Linearity

Characteristic Injector Flow Curve

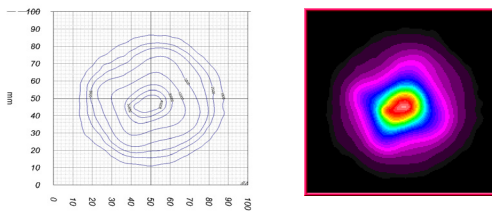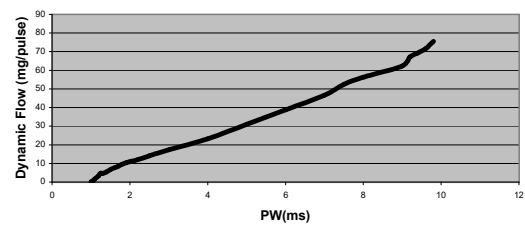

### Voltage Sensitivity

Voltage Sensitivity Summary, 6-16V

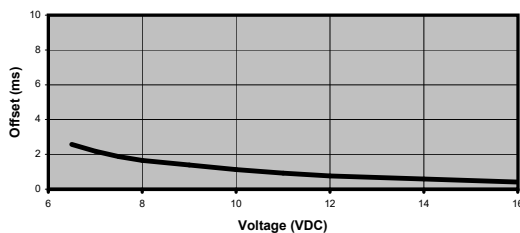

Min. Operating P.W. Linearity Error, 0-10ms

